

## MusiCall Music & Message




### MDM-S2/S4/S8 2/4/8 zone outputs

MusiCALL systems with Dante® are easily expandable, need an extra speaker? Plug it in where you want!

Networks can be expanded and reconfigured at any time with just a few clicks. If you compare a MusiCALL audio installation with a conventional audio system, it is striking how much fewer building blocks are needed to set up a complete system. Ease of installation is great for the installer.

The MDM-S series MusiCall Music & Message server is a 4U rack version with 10.1" touchscreen. It can be used as central control unit and /or announcement console when combined with a microphone like MDM-MIC.

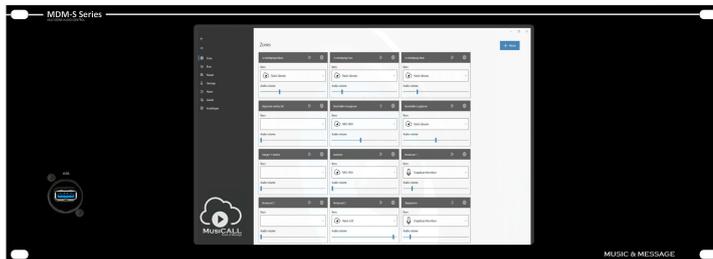

## Software

The MusiCALL software is packed with features:

Easy to use graphical interface

**Priority messaging.** Scheduled audio files (or manually triggered) to start on time (such as class times at schools or commercials in shops)

**Internetradio.** Standard presets with 15 internet radiostations, expandable.

**Playlist player**(for example themes in museums)

**Priority announcement.** Groups or individual zones.

**Auto start and stop** of zones to save energy.

1 to 8 separate zones possible per main unit, upgradable.

## Specifications

Hardware			
<b>CPU</b>	Intel Gemini Lake N4000 / N4120	<b>Wifi</b>	2.4 GHz & 5 GHz Dual frequency
<b>Screen</b>	G+G multi touch 10.1"	<b>Bluetooth</b>	Bluetooth 5.0
<b>Resolution</b>	1920 x 1200 (IPS)	<b>Operating system</b>	Windows IoT2021 LTSC
<b>Graphics</b>	Intel UHD 600	<b>Wired network</b>	1x RJ45 1000Mbps and 1x RJ45 1000Mbps via USB dongle
<b>Memory</b>	8GB	<b>Ports</b>	4x USB3.0 / 2x RS232
<b>Storage</b>	128GB EMMC drive and TF card slot	<b>Headphone jack</b>	Combo 3.5mm mic/headphone
<b>Size</b>	483 x 176 x 62mm, 4U	<b>HDMI</b>	2x HDMI 2.0 (4k support)
<b>Operation temperature</b>	-10°C ~ 50°C	<b>Weight</b>	772g
Software			
<b>Zone outputs</b>	MDM-S2: 2 (Dante®) channels for 2 mono zones or 1 stereo zone MDM-S4: 4 (Dante®) channels for 4 mono zones or 2 stereo zones MDM-S8: 8 (Dante®) channels for 8 mono zones or 4 stereo zones	<b>Inputs</b>	MDM-S2: 8 (Dante®) channels MDM-S4: 8 (Dante®) channels MDM-S8: 8 (Dante®) channels